


QPOS Plus

QPOS Plus is the new generation of standalone contactless miniPOS approved by PCI PTS 5.x, SRED. can be programmed. It boasts higher transfer speeds, contains larger battery capacity and a slew of connectivity options. With the availability to scan QR codes via the integrated camera, QPOS Plus is your new go-to device.

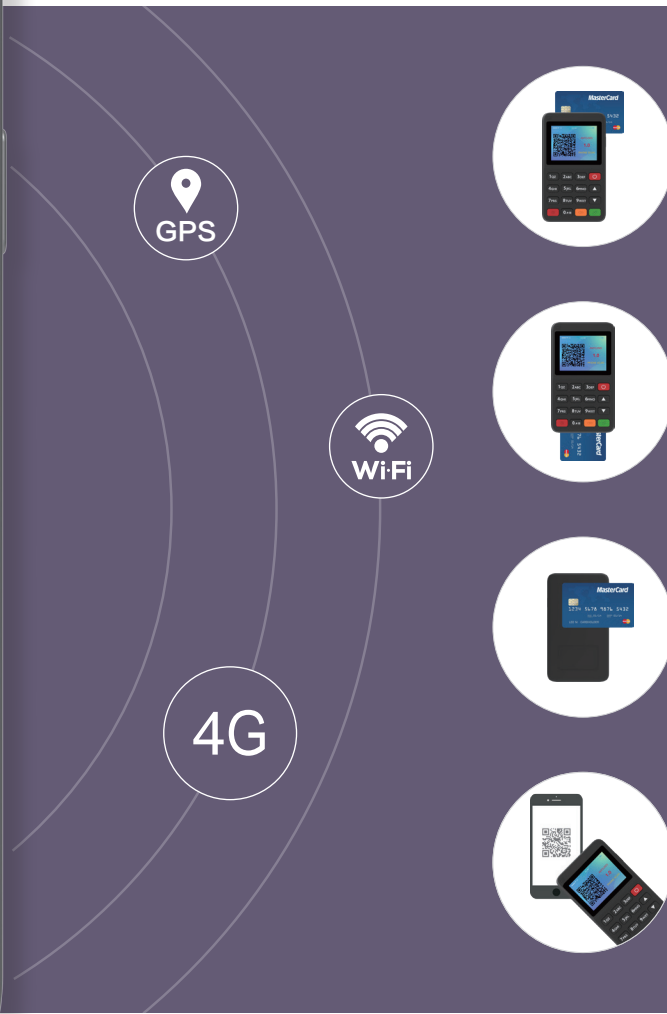

Specification:

| | |
|--------------------------|---|
| Processor | 32-bit ARM CPU, 192 MHz |
| Memory | 512KB SRAM + 512KB Flash + 1MB Flash External Storage: 4MB Flash(optional) |
| Communications | TD-LTE / FDD-LTE GSM WiFi: 802.11 b/g/n, 2.4GHz |
| Satellite Positioning | GPS (optional) |
| Card Slots | 1 SAM & 1 SIM |
| Display | 2.4-inch TFT Colour Display 320 x 240 pixels Touchscreen (optional) |
| Camera | 0.3M FF pixels (optional) |
| EMV Card Reader | EMV/PBOC Chip Card Reader, ISO 7816 Compliant Class A, B, C |
| Magnetic Card Reader | Triple tracks |
| NFC Reader | EMV contactless, ISO 14443A/B |
| Charging | Type-C USB |
| Key Management | DUKPT, Fixed Key, MK/SK |
| Encryption Algorithm | DES, 3DES, RSA, AES, SHA-256 |
| Operating System | Lark 5.0 |
| Battery | 1800mAh, 3.7V, Li-ion Battery |
| Certifications | PCI PTS 5.x SRED EMV L1&L2, Contactless L1 Visa Paywave, MasterCard Paypass Amex Expresspay, Discovery D-PAS, Rupay qSPARC PBOC L1& L2, UnionPay QuickPass, QPBOC L1,&L2 PCI PIN Security, MasterCard TQM CE, FCC, RoHS |
| Environmental Conditions | Storage temperature (-10 C to + 55 C), Operating temperature (0 C to + 45 C) Humidity (5% to 95% non-condensing) |
| Dimension | 118 x 68 x 17mm |
| Weight | 153g(Including Battery) |

Note: The above information is for reference only and may be varied at delivery. For the latest data, please contact us.



DSPREAD

Headquarter Office

Rm.407, B12C, #10 (Universal Business Park),
Jiuxianqiao Road, Chaoyang District, Beijing, China

Website:www.dspreload.com

Email:Sales@mail.dspreload.com

Tel/Fax:+86-10-84493638